

HEAVY DUTY – 1250N


HP Flex™ Pliable PVC Corrugated Conduit

Conforms to AS/NZS 2053.5-2001



Properties

Material	uPVC
Colour	Orange
Duty Rating	Heavy Duty – HD
UV Resistance	Extreme UV (T) Stabilised
Resistance to compression	1250 N / 5cm
Resistance to impact	6 Joule
Maximum Temperature	+60°C
Minimum Temperature	-5°C
IP Ingress Protection	IP66
Dielectric Strength	Electro-insulating
B.E.P Certified	Yes
Resistance to flame propagating	Non-flame propagating (UL94-V0)
Lead Free	Yes
RoHS Compliance	Heavy Metals Free (RoHS)
Rodent Repellent	Not attractive to rodents

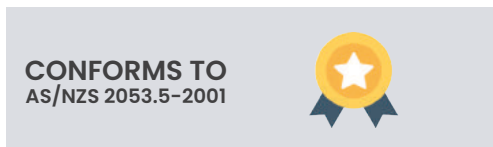

HP Flex™ Heavy Duty PVC Corrugated Conduit is ideal for underground static installations. Its high UV stabilisation and 1250N/5cm compression resistance makes it suitable for residential or industrial installations.

Conforming to AS/NZA 2053.5-2001, **HP Flex™** has a 25 year manufacturing warranty.

HEAVY DUTY – 1250N

PART NUMBER	DESCRIPTION
HPPCH20/10	HD Corrugated Conduit Roll 20mm x 10m
HPPCH20/20	HD Corrugated Conduit Roll 20mm x 20m
HPPCH20/50	HD Corrugated Conduit Roll 20mm x 50m
HPPCH25/10	HD Corrugated Conduit Roll 25mm x 10m
HPPCH25/20	HD Corrugated Conduit Roll 25mm x 20m
HPPCH25/50	HD Corrugated Conduit Roll 25mm x 50m
HPPCH32/10	HD Corrugated Conduit Roll 32mm x 10m
HPPCH32/25	HD Corrugated Conduit Roll 32mm x 25m
HPPCH40/10	HD Corrugated Conduit Roll 40mm x 10m
HPPCH40/25	HD Corrugated Conduit Roll 40mm x 25m
HPPCH50/10	HD Corrugated Conduit Roll 50mm x 10m
HPPCH50/25	HD Corrugated Conduit Roll 50mm x 25m
HPPCH63/10	HD Corrugated Conduit Roll 63mm x 10m

PART NUMBER	OUTSIDE DIAMETER (mm)	INSIDE DIAMETER (mm)	LENGTH* (M)
HPPCH20	20 (+0, -0.3)	12.7	10, 20, 50
HPPCH25	25 (+0, -0.4)	16.5	10, 20, 50
HPPCH32	32 (+0, -0.4)	22	10, 25
HPPCH40	40 (+0, -0.4)	28.3	10, 25
HPPCH50	50 (+0, -0.5)	36	10, 25
HPPCH63	63 (+0, -0.6)	46	10

***Custom lengths available**